


## Technical information

Productnumber : 86R15-60-S

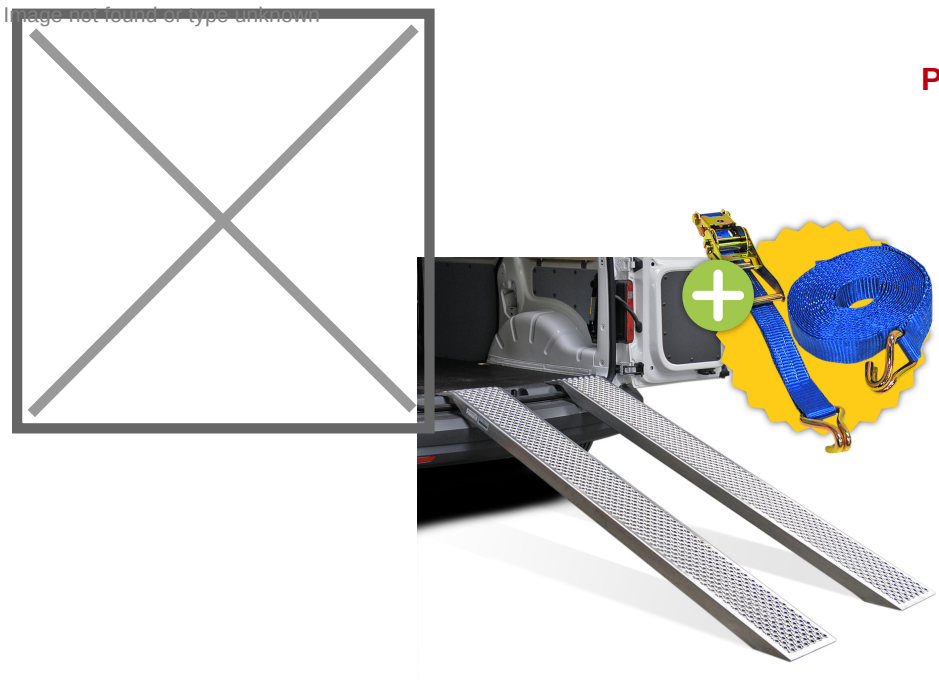

### Product description

Discount set consisting of 1 lashing strap and 1 set of 2 high-quality aluminum ramps. Very suitable for transporting vehicles such as; golf cart, quad, small car, lawnmower, carriage or e.g. mini tractors. Easy to move due to the light weight, 4.1 kg each. The anti-slip profile prevents slipping.

Maximum load capacity 1000 kg. Ideal angle 21 degrees. Ideal trailer height 50 cm. The load capacity depends on various factors and decreases if:

- the drive-on height of the ramp decreases.
- the axle distance is less than 1250 mm.
- the road contact is less than 100 x 150 mm.
- the weight distribution is different than 2/3 on one axle and 1/3 on the other axle.
- drive-up speeds are above 5 km/h.
- there are vibrations when accelerating or braking abruptly.

The ramps must be fully raised with the flat part attached to the bottom of the trailer so that it cannot slide. When calculating the load capacity, the dynamic load has been taken into account and the safety factor 2 has been used with a weight of more than 500 kg. Calculate the weight as follows; total weight of the vehicle + fuel (1 liter is 1 kg) + weight of 1 person + weight of accessories.

\* not suitable for tracked vehicles!

### Specifications

Article arrangement: New

Version: aluminium 150 cm (pair) with 1 cargo lash

Top: driving area of anti slip profile

Width (mm): 260

Loading capacity (kg): 1000

Options: NOT suitable for caterpillar

Batch (items): 2

Min Height (mm): 400

EAN Code (Gtin) 8719424120455

Type: access ramp straight

Material: aluminium

Length (mm): 1490

Height (mm): 60

Weight (kg) 4.1

Type number: 86R-S

Drive width: 260

Max Height (mm): 500



**KRUIZINGA.NL**®  
Opslag- en transportmiddelen

**KRUIZINGA.DE**®  
Lager- und Transportmittel

**KRUIZINGA.FR**®  
Stockage et ressources de transport

**KRUIZINGA.COM**®  
Material handling equipment

Image not found or type unknown

Scan the QR code for more information

A square QR code with a black and white pixelated pattern, used for linking to more information. It is positioned in the bottom left corner of the page, partially overlapping the footer text.

Scan the QR code for more information

