

Image not found or type unknown



Technical information

Productnumber : 75.246.812.152



Product description

for more information see manual.

Advantages: The polyamide wheels have low rolling resistance, offer good handling on flat surfaces, are shock and impact resistant and resistant to corrosion.

Applications: Industrial carts, material handling in factories, waste containers, transport containers, metal and chemical companies, roll containers for medium-heavy loads, tool trolleys, storage trolleys.

Suitable surface: Hard and flat such as tiles, cement and coatings.

Suitable environment: Dry and not permanently damp. With different chemicals and with saturated steam.

if you use 4 wheels with a load capacity of 300 kg each, the load capacity of the wheels is 900 kg.

Specifications

Article arrangement: New

Version: Ø 150 mm

Top: base plate 135x110 mm

Bolt hole: Ø 11 mm

Surface treatment: galvanized

Width (mm): 46

Loading capacity (kg): 300

Wheel bearing: roller bearing

EAN Code (Gtin) 8719424014549

Type: right wheel

Material: polyamide wheel

Hole centres: 105x80 mm

Colour: colorless

Length (mm): 150

Height (mm): 185

Weight (kg) 1

Type number: 754681

Scan the QR code for more information




KRUIZINGA.NL®
Opslag- en transportmiddelen

KRUIZINGA.DE®
Lager- und Transportmittel

KRUIZINGA.FR®
Stockage et ressources de transport

KRUIZINGA.COM®
Material handling equipment

Image not found or type unknown.

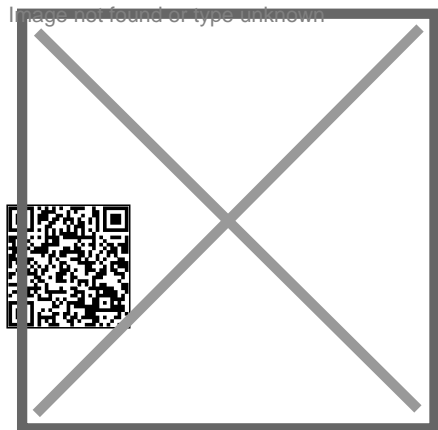

Technical information

Productnumber : 75.246.812.152



KRUIZINGA.NL[®]
Opslag- en transportmiddelen

KRUIZINGA.DE[®]
Lager- und Transportmittel

KRUIZINGA.FR[®]
Stockage et ressources de transport

KRUIZINGA.COM[®]
Material handling equipment