


Image not found or type unknown

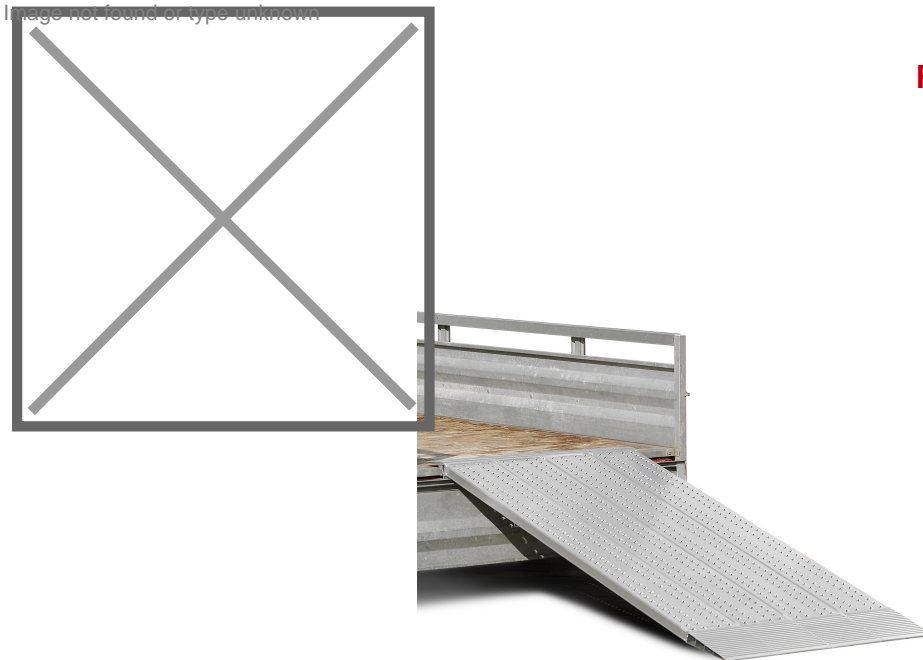

## Technical information

**Productnumber : 8608101051**

### Product description

Professional quality aluminum ramp 250 cm. Very suitable for construction machines, motorcycles, hand trucks or roll containers. Easy to move due to the light weight and the anti-slip profile prevents slipping. payload; 1110kg. Suitable for a ramp height of 39 to 69 cm.

This ramp is supplied as standard with connection A and a flat floor 1 , see detail photos. It is optionally possible to adjust this to your liking, please contact us for the possibilities or indicate your preference during the ordering process.

### Specifications

Article arrangement: New

Version: aluminium 250 cm (per piece)

Top: driving area of anti slip profile

Width (mm): 600

Loading capacity (kg): 1110

Type number: AOS-600

Min Height (mm): 390

EAN Code (Gtin) 8719424024647

Type: access ramp straight

Material: aluminium

Length (mm): 2500

Height (mm): 70

Weight (kg) 35

Additional specifications: price each

Max Height (mm): 690

Scan the QR code for more information



**KRUIZINGA.NL<sup>®</sup>**  
Opslag- en transportmiddelen

**KRUIZINGA.DE<sup>®</sup>**  
Lager- und Transportmittel

**KRUIZINGA.FR<sup>®</sup>**  
Stockage et ressources de transport

**KRUIZINGA.COM<sup>®</sup>**  
Material handling equipment